









TECHNICAL DATA

GENERAL


D	601	AHG
	M66	00

GENERAL		Mooo	
Unloading system		Rotating	
Load capacity	Kg	6000	
Chassis		Articulated and oscillating	
Water hopper capacity	1,	1665	
Level hopper capacity	ſ	2455	
Heaped hopper capacity	i i	3154	
Empty weight	Kg	4490	
Transmission		Hydrostatic	
ENGINE			
Brand		DEUTZ	
Model		TD 3.6 L4	
Power	kW	55.4	
Operating speed	rpm	2200	
Torque	Nm@rpm	330@1600	
No. of cylinders		4	
Emissions		Stage IIIB - Tier 4	
Noise	dB(A)	101	
Consumption	I/h	13	
CO2	Kg/h	10,4	
DRIVING			
Max. speed	Km/h	25	
Maximum gradient	%	45	
External turning radius	mm	5900	
Traction	2.7	4x4	
Tyres		500/60-22,5" (16 PR)	
HYDRAULIC SYSTEM	***		
Hydraulic circuit	СС	25	
Working pressure	bar	180	
TANK CAPACITY	·		
Fuel	Į.	69	
Hydraulic system	1	60	
BRAKES			
Service		Sealed brakes with multiple discs in oil. Hydraulic drive	
Parking		Sealed brakes with multiple discs in oil. Mechanical drive	





DIMENSIONS

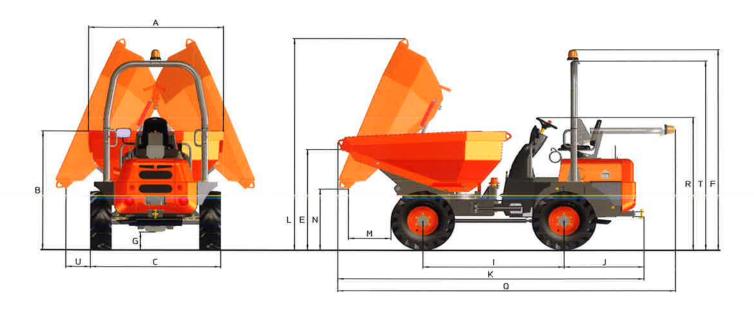

D 601 AHG	
2197	
2103	
2206	
1736	
3428	
370	
2490	
1340	
4910	
3634	
574	
1212	
5413	
2232	
3256	
102	
	2103 2206 1736 3428 370 2490 1340 4910 3634 574 1212 5413 2232 3256



www.ausa.com

Products are subject to modifications without prior notice. Images throughout the spec sheet may refer to non-standard machines or non-available configurations depending on models.

 $\ensuremath{\mathsf{AUSA's}}$ logo and corporate identity are property of the Company, they cannot be used without authorization.