





JCPT3214DC

Self-propelled Scissor Lifts


SPECIFICATIONS

| Size | Metric | British |
|----------------------------------|-------------|-------------------|
| Max. Working Height A | 32.00m | 105ft |
| Max. Platform Height B | 30.00m | 98ft 5in |
| Overall Length © | 6.41m | 21ft |
| Overall Width D | 1.40m | 4ft 7in |
| Overall Height(Rails Up) | 4.16m | 13ft 8in |
| Overall Height(Rails Down) | 3.17m | 10ft 5in |
| Platform Size(Length×Width) | 5.85m×1.20m | 19ft 2in×3ft 11in |
| Platform Extension Size G | 1.90m | 6ft 3in |
| Ground Clearance(Stowed/Raised) | 0.19m/0.02m | 8in/1in |
| Wheelbase (1) | 4.87m | 16ft |
| Turning Radius(Inside/Outside) | 2.60m/3.50m | 8ft 6in/11ft 6in |
| Tyres | 28×12-22 | 28×12-22 |

| Performance | | |
|----------------------|------------|------------|
| S.W.L | 750kg | 1653lb |
| S.W.L On Extension | 750kg | 1653lb |
| Max. Occupants | 2 | 2 |
| Gradeability | 30% | 30% |
| Travel Speed(Stowed) | 1.5km/h | 0.93mph |
| Travel Speed(Raised) | 0.1km/h | 0.06mph |
| Max. Working Slope | 1°(0°) | 1°(0°) |
| Up/Down Speed | 160/105sec | 160/105sec |

| Weight | | | |
|----------------|---------|---------|--|
| Overall Weight | 22200kg | 48942lb | |

| Power | | |
|-----------------|-------------|-------------|
| Hydraulic Tank | 220L | 58gal |
| Lithium Battery | 80V/520Ah | 80V/520Ah |
| Charger | 80V/80A | 80V/80A |
| Driving Motor | 4×53VAC/2kW | 4×53VAC/2kW |
| Lifting Motor | 53VAC/28kW | 53VAC/28kW |
| | | |

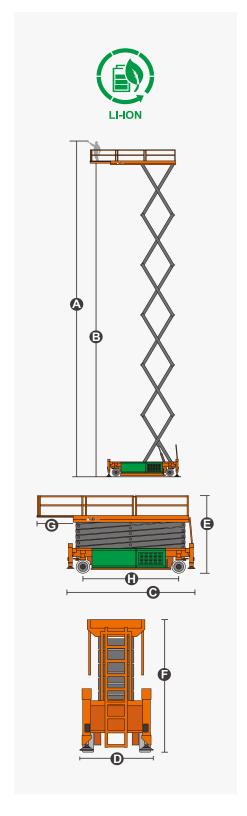







JCPT3214DC

Self-propelled Scissor Lifts

FEATURES

Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- One-Way Platform Extension Deck
- Four-Wheel Drive
- Four-Wheel Steering
- Automatic Braking System
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Charging Indicator
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System
- Drivable At Full Height



ZHEJIANG DINGLI MACHINERY CO., LTD.

Address: No.188 Qihang Road, Deqing, Zhejiang P.R.C 313219

Telephone: +86(572)8681688 E-Mail: export@cndingli.com Https://en.cndingli.com











